




Spring Cleaning with billyGO

FLUSH WATER HEATER

M-38424 | TACLB41879E | PATENT PENDING

Over time mineral deposits, dirt and bacteria grow in the bottom of your hot water heater, causing damage to the tank and decreasing the lifespan.

To protect the tank and help keep energy bills low, it is recommended to flush the heater once a year.

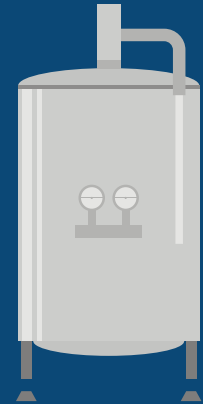

STEP ONE



- Turn off the gas-line or electricity switch, the thermostat and the cold-water supply

STEP TWO



- Turn on the closest faucet inside the home, putting the hot water on full blast

STEP THREE



- Open the pressure valve on the tank and attach a garden hose to the drainage valve

STEP FOUR



- Drain the tank into a bucket, letting the water run clear

STEP FIVE



- Once the water is clear, turn on the cold-water supply to the tank and let the water run through, flushing the tank

STEP SIX



- After flushing is over, close the drainage spout, remove the hose, close the pressure valve and begin to refill the tank

STEP SEVEN



- When the tank is full, open the pressure valve to relieve any build up

STEP EIGHT



- Close all valves and spouts and power up the water heater, it should take about 20 - 30 minutes



SCAN TO DOWNLOAD THE APP AND
SCHEDULE YOUR APPOINTMENT



[billyGO.com](https://www.billygo.com)



(817) 722-6151